
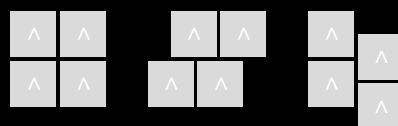


## Technical details carpet tiles

Manufacturing type	Herstellungsart	Mode fabrication	Productie methode			<b>tufted 1/8"</b>
Construction	Struktur	Structure	Structuur			<b>2-ply cut pile</b>
Pile composition	Polmaterial	Couche d'usure	Poolsamenstelling			<b>100% PA 6</b>
Dye method	Farbgestaltung	Coloration	Kleurverwerking			<b>solution dyed</b>
Primary backing	Trägermaterial	Premier dossier	Tuftdoek			<b>polyester fleece</b>
Secondary backing	Rückenausrüstung	Dossier	Rug			<b>GREENBASE modified bitumen</b>
Pile weight	Poleinsatzgewicht	Poids de velour	Poolgewicht	ISO 2424	g/m <sup>2</sup>	<b>1.250</b> (+/-)
Total weight	Gesamtgewicht	Poids total	Totaal gewicht	ISO 8543	g/m <sup>2</sup>	<b>4.800</b> (+/-)
Pile height	Polhöhe	Hauteur du velours	Poolhoogte	ISO 1766	mm	<b>9,5</b> (+/-)
Total height	Gesamtdicke	Epaisseur totale	Totale dikte	ISO 1765	mm	<b>10,5</b> (+/-)
Tuft density	Noppenzahl	Nombre de touffes	Aantal punten	ISO 1763	/m <sup>2</sup>	<b>144.000</b> (+/-)
Size	Abmessung	Dimension	Afmeting		cm	<b>50 x 50</b>
Packing	Verpackung	Emballage	Verpakking			<b>12 per box 3 m<sup>2</sup></b>
Classification	Klassifikation	Classement	Gebruiksklasse	EN 1307		<b>32 general commercial</b>
Comfort rating	Komfortklasse	Classement confort	Comfort klasse	EN 1307		<b>LC5</b>
Castor chair	Stuhlleneignung	Chaise à roulettes	Rolstoelgeschikt	EN 985		<b>Intensive</b>
Dimensional stability	Dimensionstabilität	Stabilité dimensionnelle	Dimensionele stabiliteit	EN 986		<b>≤ 0,2%</b>
Fire resistance	Brennverhalten	Comportement feu	Brandgedrag	EN 13501-1		<b>Bfl-S1</b> loose laid
Permanent antistatic	Permanent Antistatisch	Antistatique permanent	Permanent antistatisch	ISO 6356	kV	<b>≤ 2,0</b>
Transversal resistance	Durchgangswiderstand	Résistance transversale	Doorgangsweerstand	ISO 10965	Ω	<b>≥ 10<sup>10</sup></b>
Thermal resistance	Wärmedurchlaßwiderstand	Résistance thermique	Warmtedoorlaatweerstand	ISO 8302	m <sup>2</sup> /K/W	<b>0,122</b>
Sound absorption	Schallabsorptionsgrad	Absorption phonique	Geluidsabsorptie	ISO 354	α <sub>w</sub>	<b>0,20</b>
Impact sound reduction	Trittschallverbesserungsmaß	Isolation phonique	Geluidsisolatie	ISO 10140	ΔL <sub>v</sub>	<b>25 dB</b>
				ISO 10140	ΔL	<b>42 dB</b> (1000 Hz)
Colour fastness light	Lichtechtheit	Solidité à la lumière	Lichtechtheid	ISO 105 B02		<b>≥ 7</b>
Rubbing fastness	Reibechtheit	Solidité au frottement	Wrijftechtheid	ISO 105 X12		<b>≥ 5</b> wet/dry
Water fastness	Wasserechtheit	Solidité à l'eau	Waterechtheid	ISO 105 E01		<b>colour/staining</b>

### Wall-to-wall

Scan the QR code for the technical details of wall-to-wall.



**EN1307**  
for use as floorcovering  
in buildings (EN 14041)  
according to the  
manufacturer's specification

**CE**  
**23**  
**EN 14041**  
**DOP 000657T-001**

