



GROOVE BRICK



Technical details carpet tiles

Manufacturing type	Herstellungsart	Mode fabrication	Productie methode				tufted 1/10ⁿ
Construction	Struktur	Structure	Structuur				structured loop pile
Pile composition	Polmateriaal	Couche d'usure	Poolsamenstelling				100% PA 6 - Econyl®
Dye method	Farbgestaltung	Coloration	Kleurverwerking				50% SD - 50% space dyed
Primary backing	Trägermaterial	Premier dossier	Tuftdoek				polyester fleece
Secondary backing	Rückenausrüstung	Dossier	Rug				GREENBASE modified bitumen
Pile weight	Poleinsatzgewicht	Poids de velour	Poolgewicht	ISO 2424	g/m ²	620	(+/-)
Total weight	Gesamtgewicht	Poids total	Totaal gewicht	ISO 8543	g/m ²	4.450	(+/-)
Pile height	Polhöhe	Hauteur du velours	Poolhoogte	ISO 1766	mm	4,0	(+/-)
Total height	Gesamtdicke	Epaisseur totale	Totale dikte	ISO 1765	mm	7,0	(+/-)
Tuft density	Noppenzahl	Nombre de touffes	Aantal punten	ISO 1763	/m ²	190.000	(+/-)
Size	Abmessung	Dimension	Afmeting		cm	50 x 50	
Packing	Verpackung	Emballage	Verpakking			20 per box	5 m²
Classification	Klassifikation	Classement	Gebruiksklasse	EN 1307		33	heavy commercial
Comfort rating	Komfortklasse	Classement confort	Comfort klasse	EN 1307		LC 2	
Castor chair	Stuhlleneignung	Chaise à roulettes	Rolstoelgeschikt	EN 985		r = 2.4	A (intensive)
Dimensional stability	Dimensionstabilität	Stabilité dimensionnelle	Dimensionele stabiliteit	EN 986		≤ 0,2%	
Fire resistance	Brennverhalten	Comportement feu	Brandgedrag	EN 13501-1		Bfl-S1	loose laid
Permanent antistatic	Permanent Antistatisch	Antistatique permanent	Permanent antistatisch	ISO 6356	kV	≤ 2,0	
Transversal resistance	Durchgangswiderstand	Résistance transversale	Doorgangsweerstand	ISO 10965	Ω	≤ 10⁹	
Thermal resistance	Wärmedurchlaßwiderstand	Résistance thermique	Warmtedoorlaatweerstand	ISO 8302	m ² /K/W	0,057	
Sound absorption	Schallabsorptionsgrad	Absorption phonique	Geluidsabsorptie	ISO 354	α _w	0,15	
Impact sound reduction	Trittschallverbesserungsmaß	Isolation phonique	Geluidsisolatie	ISO 10140	ΔL _w	24 dB	
						ISO 10140	ΔL
Colour fastness light	Lichtechtheit	Solidité à la lumière	Lichtechtheid	ISO 105 B02		6-7	
Rubbing fastness	Reibechtheit	Solidité au frottement	Wrijftechtheid	ISO 105 X12		4-5	wet/dry
Water fastness	Wasserechtheit	Solidité à l'eau	Waterechtheid	ISO 105 E01		4-5	colour/staining

Scan the QR code and discover the collection.

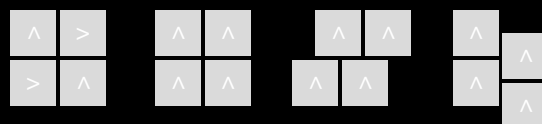

EN1307
for use as floorcovering
in buildings (EN 14041)
according to the
manufacturer's specification

CE
20
EN 14041
DOP 000622T-001

ECONYL®
ENDLESS POSSIBILITIES

