


## Technical details wall-to-wall

|                        |                             |                         |                         |             |                 |                                   |
|------------------------|-----------------------------|-------------------------|-------------------------|-------------|-----------------|-----------------------------------|
| Manufacturing type     | Herstellungsart             | Mode fabrication        | Productie methode       |             |                 | <b>tufted 1/10"</b>               |
| Construction           | Struktur                    | Structure               | Structuur               |             |                 | <b>structured loop pile</b>       |
| Pile composition       | Polmateriaal                | Couche d'usure          | Poolsamenstelling       |             |                 | <b>100% PA 6 - Econyl®</b>        |
| Dye method             | Farbgestaltung              | Coloration              | Kleurverwerking         |             |                 | <b>solution dyed</b>              |
| Primary backing        | Trägermaterial              | Premier dossier         | Tuftdoek                |             |                 | <b>non-woven</b>                  |
| Secondary backing      | Rückenausrüstung            | Dossier                 | Rug                     |             |                 | <b>action backing</b>             |
| Pile weight            | Poleinsatzgewicht           | Poids de velour         | Poolgewicht             | ISO 2424    | g/m²            | <b>600</b> (+/-)                  |
| Total weight           | Gesamtgewicht               | Poids total             | Totaal gewicht          | ISO 8543    | g/m²            | <b>1.900</b> (+/-)                |
| Pile height            | Polhöhe                     | Hauteur du velours      | Poolhoogte              | ISO 1766    | mm              | <b>4,0</b> (+/-)                  |
| Total height           | Gesamtdicke                 | Epaisseur totale        | Totale dikte            | ISO 1765    | mm              | <b>6,0</b> (+/-)                  |
| Tuft density           | Noppenzahl                  | Nombre de touffes       | Aantal punten           | ISO 1763    | /m²             | <b>192.000</b> (+/-)              |
| Size                   | Abmessung                   | Dimension               | Afmeting                |             | cm              | <b>400</b>                        |
| Classification         | Klassifikation              | Classement              | Gebruiksklasse          | EN 1307     |                 | <b>33</b> <b>heavy commercial</b> |
| Comfort rating         | Komfortklasse               | Classement confort      | Comfort klasse          | EN 1307     |                 | <b>LC 1</b>                       |
| Castor chair           | Stuhlrolleneignung          | Chaise à roulettes      | Rolstoelgeschikt        | EN 985      |                 | <b>A</b> <b>intensive</b>         |
| Stair suitability      | Treppeneignung              | Escaliers               | Trappengeschikt         | EN 1963     |                 | <b>A</b> <b>intensive</b>         |
| Fire resistance        | Brennverhalten              | Comportement feu        | Brandgedrag             | EN 13501-1  |                 | <b>Bfl-S1</b> <b>glued</b>        |
| Permanent antistatic   | Permanent Antistatisch      | Antistatique permanent  | Permanent antistatisch  | ISO 6356    | kV              | <b>≤ 2,0</b>                      |
| Transversal resistance | Durchgangswiderstand        | Résistance transversale | Doorgangsweerstand      | ISO 10965   | Ω               | <b>≥ 10<sup>10</sup></b>          |
| Thermal resistance     | Wärmedurchlaßwiderstand     | Résistance thermique    | Warmtedoorlaatweerstand | ISO 8302    | m²/K/W          | <b>0,078</b>                      |
| Sound absorption       | Schallabsorptionsgrad       | Absorption phonique     | Geluidsabsorptie        | ISO 354     | α <sub>w</sub>  | <b>0,15</b>                       |
| Impact sound reduction | Trittschallverbesserungsmaß | Isolation phonique      | Geluidsisolatie         | ISO 10140   | ΔL <sub>w</sub> | <b>25 dB</b>                      |
|                        |                             |                         |                         | ISO 10140   | ΔL              | (1000 Hz)                         |
| Light fastness         | Lichtechtheit               | Solidité à la lumière   | Lichtechtheid           | ISO 105 B02 |                 | <b>≥ 7</b>                        |
| Rubbing fastness       | Reibechtheit                | Solidité au frottement  | Wrijftechtheid          | ISO 105 X12 |                 | <b>≥ 5</b> <b>wet/dry</b>         |
| Pattern repeat         | Musterwiederholung          | Répétition du motif     | Patroonherhaling        |             | W x H           | <b>244 x 200 cm</b>               |

Scan the QR code and discover the collection.

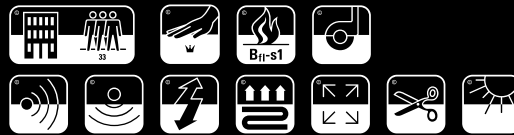

**EN 1307**  
for use as floorcovering  
in buildings (EN 14041)  
according to the  
manufacturer's specification

**CE**  
**22**  
**EN 14041**  
**DOP 000553A-003**

